




BLACK BOX[®]

NETWORK SERVICES

© 2003. All rights reserved.
Black Box Corporation.

Black Box Corporation • 1000 Park Drive • Lawrence, PA 15055-1018 • Tech Support: 724-746-5500 • www.blackbox.com • e-mail: info@blackbox.com

SERIAL ↔ PARALLEL CONVERTER (38.4 KBPS)

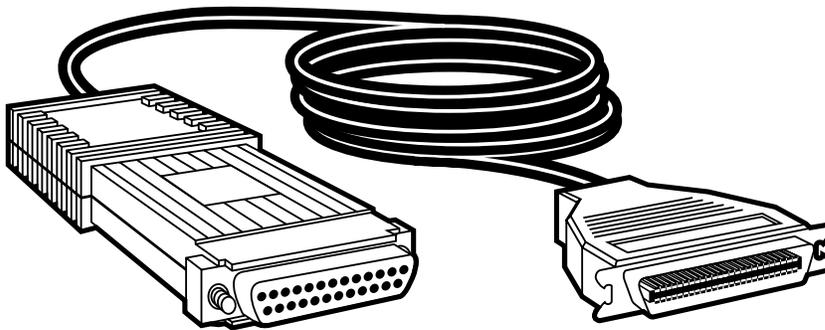

Use this converter to connect your parallel printer to your serial PC.

Key Features

- ▶ **Converts serial data to parallel data.**
- ▶ **Data rates to 38.4 kbps.**
- ▶ **Built-in 1-kbit buffer prevents data loss.**
- ▶ **Supports both X-ON/X-OFF and hardware flow control.**
- ▶ **DCE/DTE autosensing.**
- ▶ **No AC power or batteries required.**
- ▶ **Compact and easy to install.**
- ▶ **Includes a 6-foot (1.8-m) cable and a Centronics connector.**

Sometimes you just need a plain old printout. Nothing fancy. Nothing that requires expensive printers. Why not just use your tried-and-true printer?

The Serial↔Parallel Converter lets you use your existing parallel printer with your PC's serial port. User-selectable speeds top out at 38.4 kbps, and a built-in 1-kbit buffer keeps data moving along and prevents timing-conflict data loss.

For flow control, the unit converts the parallel BUSY signal to the appropriate signal on the serial interface for hardware or software flow control.

An 8-position DIP switch enables you to control data rate, parity, and data bits. DCE/DTE selection is autosensing.

No extra power or batteries are required. The converter comes with a DB25 female connector on the computer side and a 6-foot (1.8-m) cable ending in a 36-pin male Centronics connector on the printer side.

Specifications

Data Format: 7 data bits, even or odd parity; 8 data bits, no parity; 1 or 2 stop bits; selectable via 8-position DIP switch

Flow Control: Serial: Hardware or software (X-ON/X-OFF); Parallel: Hardware (BUSY/ACK)

Leads Supported:
Serial: Pins 1-9, 11, 19, 20;
Parallel: Pins 1-11 active; 16-19, 30, 33, 36 ground

Operation: DTE/DCE autosensing

Serial Data Rates: 300, 600, 1200, 2400, 4800, or 9600 bps; 19.2 or 38.4 kbps

Connectors: Serial: (1) DB25 F; Parallel: (1) 36-pin Centronics[®] M attached to the end of 6-ft. (1.8-m) connector cable

Interface: Asynchronous RS-232 serial and Centronics parallel

Operational Environment:
Temperature: 32 to 140°F (0 to 60°C);
Humidity: 5 to 95% noncondensing;
Altitude (maximum): 10,100 ft. (3078.5 ft.)

Power: From RS-232 interface; Pins 9 or 8, 6, 5, 4, 3, 2 or 20

Size: 0.9"H x 2.1"W x 4.3"D (2.3 x 5.3 x 10.9 cm)

Ordering Information

ITEM	CODE
Serial↔Parallel Converter (38.4 kbps).....	PI080A-R2